


BRINE COOLER - WI_SERIES - [H-Flow]

WI_H1

H11 10kW	H17 200kW
-------------	--------------

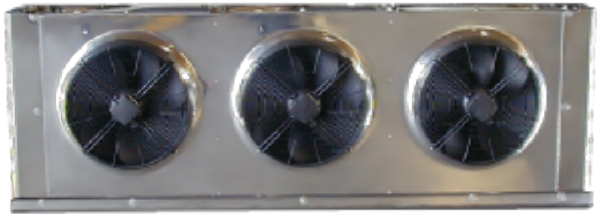

Main features

Horizontal wall construction

Single fan row

Single coil

Horizontal air flow

Electrical and control accessories, integrated hydraulic fittings and components related to the structure are completing our offer range

Standard heat exchanger execution with aluminium fins and copper tubes in single or double circuit execution







AC and brushless EC fans with 90, 230, 310, 350, 400, 450, 500, 560, 630, 710, 800 mm diameter, for 50 Hz or 60 Hz of grid frequency

Fan section with intermediate panels guaranteeing a homogenous air flow preventing turbulences between fans

Fan cover plates made of one piece

Frame made of welded square section stainless steel pipes (*depending on the serie)

Construction and cover panels made of aluminium

- | | | | |
|--|-----------------------------|---|-----------------------------|
|  | PERFORMANCE WARRANTY |  | EFFICIENCY GUARANTEE |
|  | LOW NOISE LEVEL |  | INCREASED SURFACE |
|  | TREATMENT READY |  | INTEGRATION MODULES |